

0.330 (x11)
POSITIVE
LUG OPENING

0.210 (x2)

8.250

0.750 PITCH

3.382

3.000

7.875

0.938

0.128 (x2)

0.255 (x10)
NEGATIVE
LUG OPENING

Ø 0.31

3/32Ø


R 0.33

0.075

0.450

0.07

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION, AND MAY NOT BE USED, COPIED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN OR MANUFACTURE WITHOUT THE PRIOR WRITTEN CONSENT OF DOYLE MANUFACTURING INC.

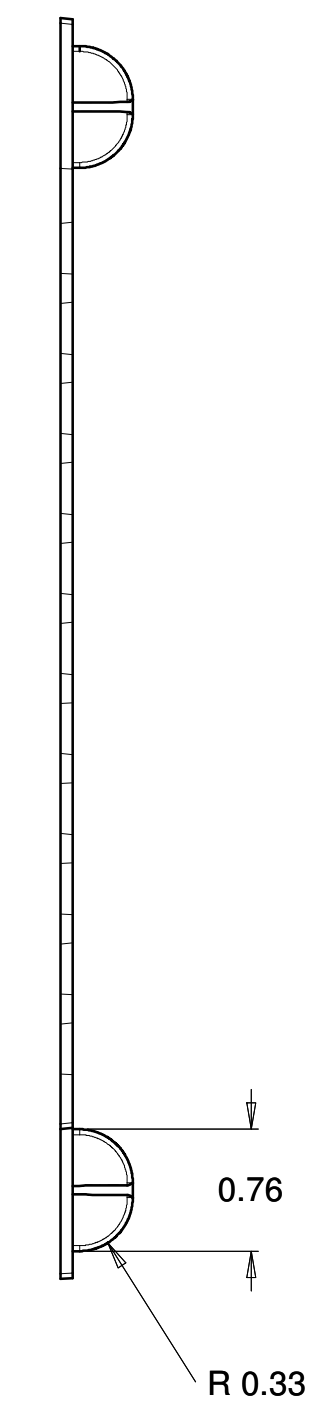

REVISION	DESCRIPTION		BY	DATE
DRAWN D. WATERS	DATE	DOYLE MANUFACTURING INC. MAKING PLASTIC MOLDS SINCE 1975.		
TOLERANCE UNLESS SPECIFIED .X = +/- .060 .XX = +/- .030		.XXX = +/- .010 .XXXX = +/- .005	1440 HOLLOWAY ROAD HOLLAND, OHIO 43528	QUALITY CERTIFIED ISO/TS16949:2002
CUSTOMER SHAMROCK	PART NO. TBC-IND23	PART NAME BATTERY ELEMENT MOSSING PROTECTOR		
MATERIAL PP OR LDPE	SHRINKAGE	JOB #	SHT 1	
COLOR	UNITS INCHES	2011-04		OF 1