

0.330 (x16)
POSITIVE
LUG OPENING

0.750 PITCH

12.000
33 PLATES

0.210 x2

3.382
3.000

7.875

0.938


0.128 x2

0.255 (x15)
NEGATIVE
LUG OPENING

Ø 0.31

3/32Ø

R 0.034

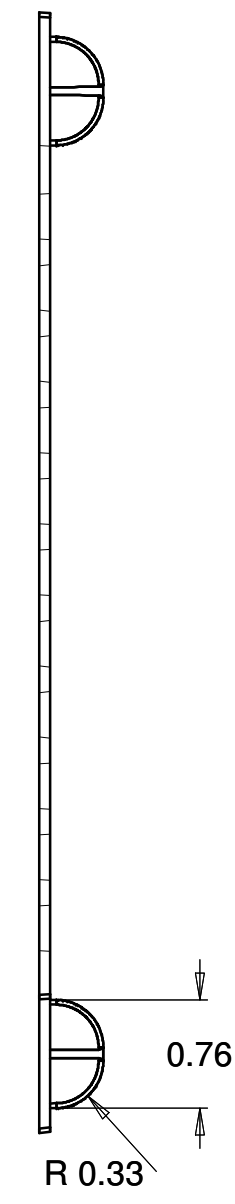

0.075

0.450

0.070

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION, AND MAY NOT BE USED, COPIED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN OR MANUFACTURE WITHOUT THE PRIOR WRITTEN CONSENT OF DOYLE MANUFACTURING INC.

REVISION	DESCRIPTION	BY	DATE
DRAWN D. WATERS	DATE	DOYLE MANUFACTURING INC. MAKING PLASTIC MOLDS SINCE 1975. 1440 HOLLOWAY ROAD QUALITY CERTIFIED HOLLAND, OHIO 43528 ISO/TS16949:2002	
TOLERANCE UNLESS SPECIFIED .X = +/- .060 .XXX = +/- .010 .XX = +/- .030 .XXXX = +/- .005			
CUSTOMER SHAMROCK	PART NO. TBC-IND33	PART NAME BATTERY ELEMENT MOSSING PROTECTOR	
MATERIAL PP OR LDPE	SHRINKAGE	JOB #	SHT
COLOR	UNITS INCHES	<h1>2011-04</h1>	1
			OF